





IP 66

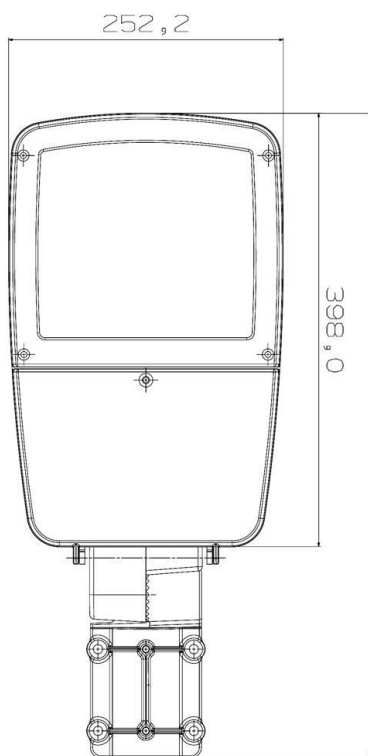

RAL 7035

RAL 9005

Applications :

Street Lighting
Park & Garden Lighting
Pedestrian Road Lighting
Car Park Lighting
Wide Area Lighting

Driver Protections :

Open Circuits
Short Circuits
Low & High Voltage
Soft Start
Thermal Protection

CERTIFICATES:

- EN 60598-2-3
- ENEC
- KEMA-KEUR
- CB
- UL
- ISO 9001
- ISO 14001
- OHSAS 18001
- CE



Test Report issued under the responsibility of :



TECHNICAL SPECIFICATION


Model No:	COMM-36-A50CS-S
Power	50W
Input Voltage	100-277V AC 50/60 Hz
Led Pieces	High Power Led 36
Lumen	6586 Lumen
Colour Temperature	4000-5000-6500 Kelvin
Led Life (LM80)	>60.000 Hours
Working Temperature	-30 / +60 C°
Lighting Angele	130° H / 60° V
IP Class	IP66
Body Material	Aluminium Injection
Front Side	4mm Tempered Glass
Arm Diameter	4-6 cm
Weight	6 kg
Dimensions	25 x 60 x 6 cm

36 LED




LIGHTING CURVE


TYPE II

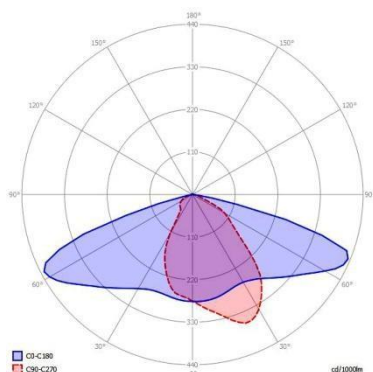


TYPE III

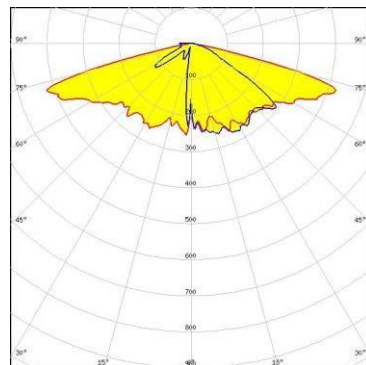

BODY THERMAL RESULT

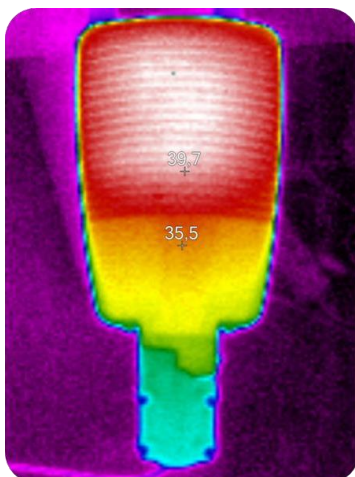

CLASS I

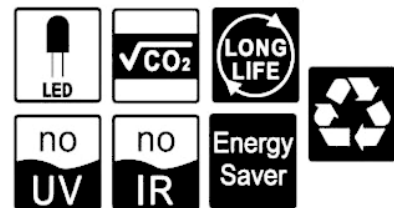

Glass **IK08** **IK10** Body

PFC PFC FUNCTION

DIMM Options :

- DALI
- StepDIMM
- SmartTimer Dimming
- 0-10V

Hardware Options

- Optional High/Middle Power LED Brands
- Optional Led Driver Brands
- External Surge Protection
- RAL XXXX