


直流深井潜水泵 DC Deep Well Submersible Pump (Potable Water)

主要用途: 深井取水、牲畜饮水、清洗、农业浇灌、远距离家庭供水。

Application:
 Great for livestock watering
 Irrigation
 Deep well, remote home and cabin

Features:

- ▶ For 4" wells or larger
- ▶ Quick disconnect with "Watertight-Gland" Design Pat Pend
- ▶ Corrosion-proof housing with stainless-steel fastener
- ▶ Run dry without damage
- ▶ State of the art solid diaphragm
- ▶ Stainless Steel Fastener
- ▶ Pump Design: Positive Displacement 3 Chamber Diaphragm Pump
- ▶ Motor: Permanent Magnet Thermally Protected
- ▶ Internal Bypass: 105-110 PSI Max. (7.2-7.5 BARS)
- ▶ Outlet Port: 1/2" (12.7mm) Barbed Fitting
- ▶ Inlet: 50 Mesh Stainless Steel Screen
- ▶ Material: High Strength Engineered Plastic

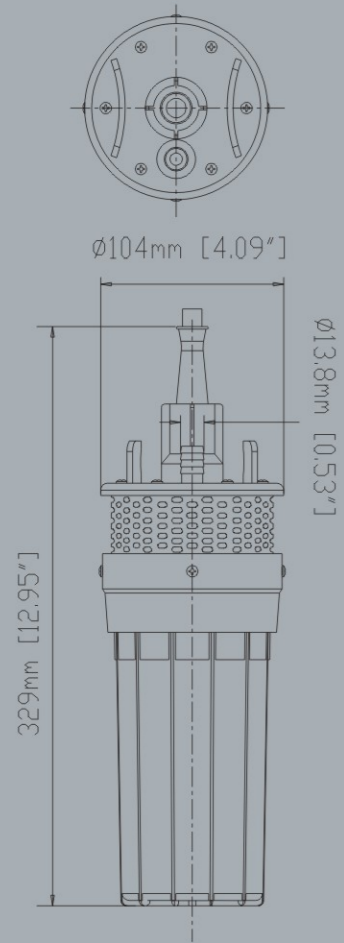

TECHNICAL DATA

Model	Volt	Amps	Flow Rate (lph/gph)	Maximum Lift	Maximum Submersion	Packing Size (mm)	N.W/G.W (kg)
SFBP2-G96-08	24VDC	4.0 MAX	360/96	230 Feet (70 Meters)	100 Feet (30 Meters)	355*130*110	2.9/3.0

Single Inlet Bottled Water Dispensing System

主要用途: 饮水机用于从5加仑桶装纯净水里抽水。该系统在压力下可将水分配到各个水龙头，冰箱和冷冻室以及一些商业上为咖啡和茶提供水源。

Application:

The Bottled Water Dispensing System is designed to pump purified water from a commercially available 5-gallon purified water bottle. The system will deliver the water under pressure to an individual drinking water faucet, the water inlet of a refrigerator for the ice-maker and chilled drinking water tap, and to certain commercial coffee / tea brewers.

Features:


- ▶ Float switch for automatic shut-off when bottle is empty
- ▶ Built-in check valve to prevent back flow
- ▶ Universal seal cap fits most water containers
- ▶ Compact size for easy mounting
- ▶ 20 in. (6.1 m) discharge hose included
- ▶ Automatic thermal cut-off device for additional protection.
- ▶ Easy installation



TECHNICAL DATA

Model	Volt	Flow Rate (lph/gph)	Current	Pressure (Psi/Bar)	Packing Size (mm)	N.W/G.W (kg)
SFDP1-010-040-210	12V	3.8/1.0	3.0A MAX	40/2.8	595*260*90	2.9/3.2
SFDP2-010-040-210	24V	3.8/1.0	1.5 A MAX	40/2.8	595*260*90	2.9/3.2
SFDPA1-010-040-210	110V/60HZ	3.8/1.0	0.5 A MAX	40/2.8	595*260*90	2.9/3.2
SFDPA2-010-040-210	220V/50HZ	3.8/1.0	0.25 A MAX	40/2.8	595*260*90	2.9/3.2

Kitchen / Refrigerator with Single Inlet BW System

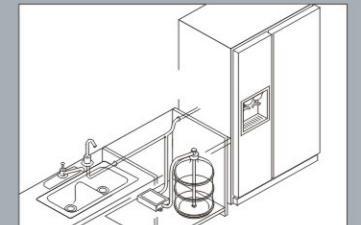

Coffee Cart / Kiosk with Single Inlet BW system

